

DESCRIPTION


This series keystone jacks work together with high-speed cables, cords and panels to provide performance beyond proposed Category 6A standards, a new feature of this series jack is a universal-colored wiring label that eliminates the need for separate codes for T568A/B wiring scheme.

APPLICATION

- Available in Cat. 6A, T568A/B wiring, meet or exceed TIA/EIA Cat. 6A requirements
- Overall zinc alloy shielding design meets the industry standards
- Compact jack design, 8 positions and 8 conductors
- Contact: phosphor bronze, phosphor bronze with 6 to 50 μ " gold plate
- Accept 22-26 AWG solid with an insulation diameter of 0.4-0.6 mm
- Easy to be terminated, low attenuation loss and high return loss
- High reliability and superior performance
- Available in different colors



PRODUCT DIMENSIONS

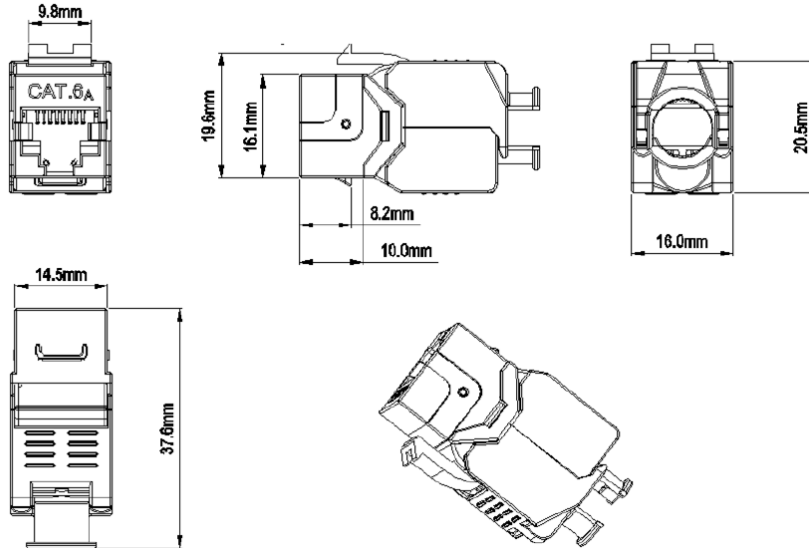

CONSTRUCTION

Description	Parameter
Contact resistance (max)	20mΩ
Insulation resistance (min)	500MΩ
Return loss (dB)	5.9dB

ORDERING INFORMATION

Product code	Description	Color	Inner Box	Carton	Carton measurement (L*W*H)	Weight
3-1422001	Cat. 6A shielded keystone jacks (180 degree)	Silver	25 pcs.	250 pcs.	53 cm × 31 cm × 23 cm	9.20 kg



PERFORMANCE

