



DESCRIPTION

CAT6A performance requirements, comply with 10 Gigabit Ethernet application system, suitable for connection between FD to the outlet of the work area, providing up to 550 MHz available bandwidth.

APPLICATION


- Unique exterior design, simple, compact and beautiful
- Comply with ergonomic principle and with termination-free design
- Unique PCB circuit board design reduces EMI/RFI interference, low attenuation loss and high return loss
- Overall zinc alloy shielding design meets the industry standards
- Meet the requirements of both T568A/T568B with clear color labels
- Solid and corrosion phosphor bronze IDC enables over 250 terminations
- Accept 23 AWG wires, phosphor bronze contact with 50 μ " gold plate, with a durability of 1500 matching recycles
- Easy installation with clear colored labels on termination cap
- Termination caps prevent wire from dropping off
- With backward compatibility of CAT 6 and lower classes

CONSTRUCTION


Description	Parameter
Contact resistance (max)	20m Ω
Insulation resistance (min)	500M Ω
Return loss (dB)	5.9dB



PRODUCT DIMENSION

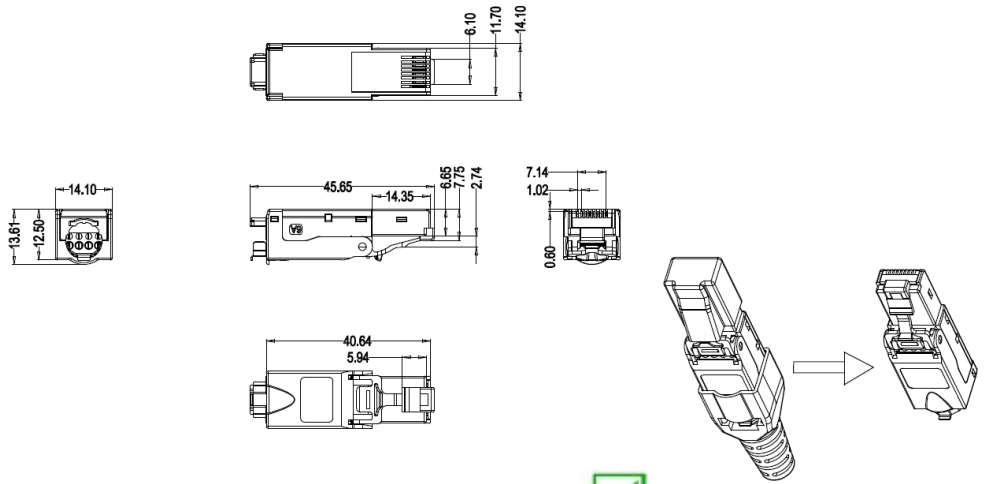

PERFORMANCE

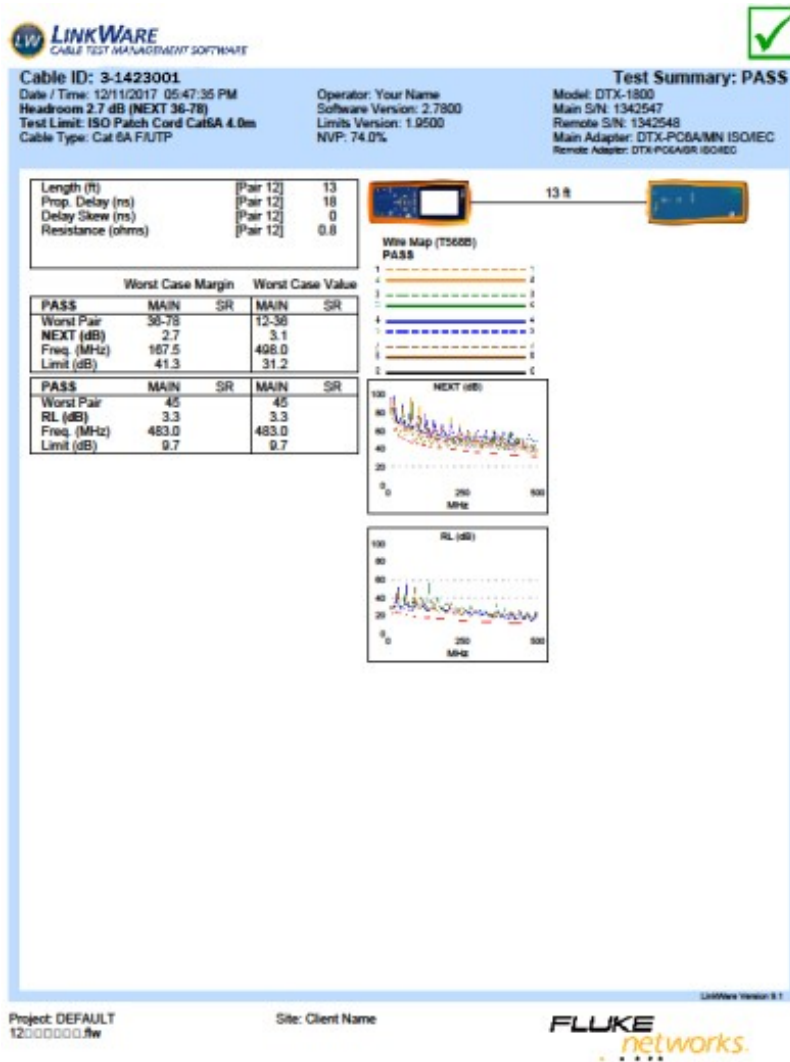

ORDER INFORMATION

Part No.	Description	Color	Inner Box	Carton	Carton measurement (L*W*H)	Weight
3-1423001	Cat.6A Shielded Fielded Plug	Metallic	1 pc.	250 pcs.	53.5 x 29.5 x 26.5 cm	10.5 kg