



## **DESCRIPTION**


Cat. 5E FTP 24-port patch panel, 110 type, matches and exceeds CAT5E 250MHZ connecting hardware specifications. Suitable for interaction and termination of horizontal cabling between devices, equipment and centralized points.

## **APPLICATION**

- Unique exterior design, simple, compact and beautiful
- High strength die-casted zinc alloy shielding design meets the industry shielding standards
- 110-krone punch down tools are available
- solid and corrosion phosphor bronze IDC enables over 250 terminations
- Unique PCB circuit board design reduces EMI/RFI interference, low attenuation loss and high return loss
- Solid and easy installation design saves installation and operation costs
- Be compatible with 19-inch equipment racks, cabinets and wall mount shelf
- All ports are clearly labeled, especially the large in the front are helpful for ports identification
- With 15 $\mu$ ” gold plate, durability is 1500 matching recycles
- With cable management in the rear for effective guidance of cables and termination points
- With backward compatibility of Cat. 5 and lower classes



## PRODUCT DIMENSIONS

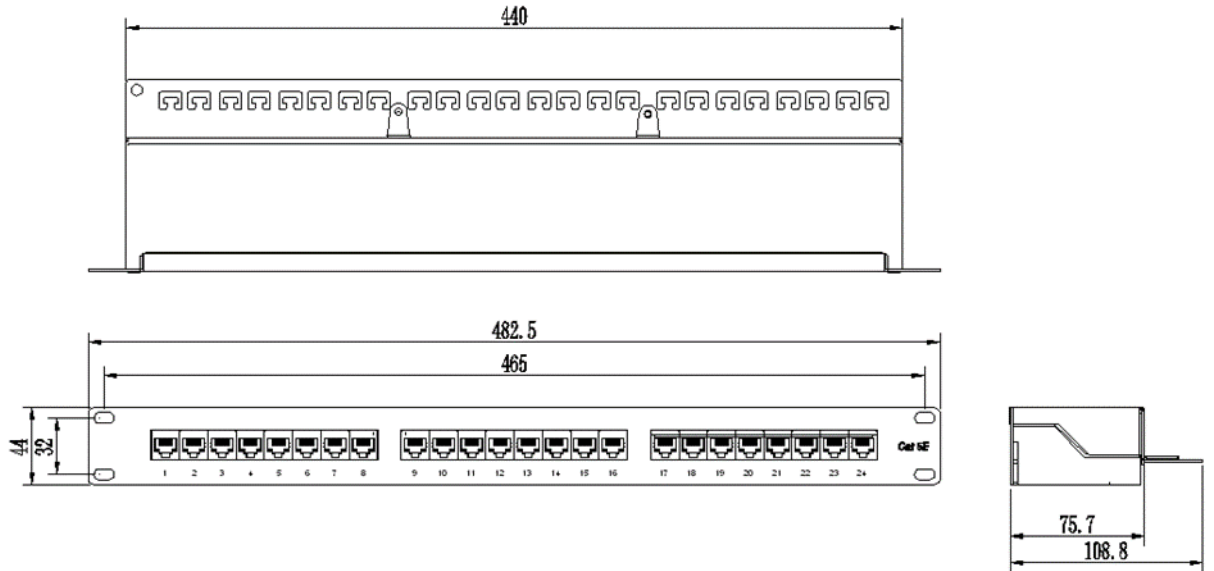

## CONSTRUCTION


Description	Parameter
Contact resistance (max)	20mΩ
Insulation resistance (min)	500MΩ
Return loss (dB)	5.8dB

## ORDERING INFORMATION

Product code	Description	Color	Inner Box	Carton	Carton measurement (L*W*H)	Weight
9-1524001	Cat. 5E FTP 24-port patch panel	Black	1 pc.	10 pcs.	53 cm × 31 cm × 23 cm	10 kg



## PRODUCT PERFORMANCE

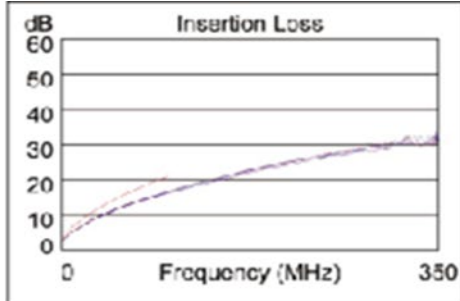

Length (m), Limit 90.0	[Pair 78]	76.5
Prop. Delay (ns), Limit 498	[Pair 36]	376
Delay Skew (ns), Limit 44	[Pair 36]	6
Resistance (ohms)		N/A
Insertion Loss Margin (dB)	[Pair 36]	4.3
Frequency (MHz)	[Pair 36]	100.0
Limit (dB)	[Pair 36]	21.0

