




DESCRIPTION

CAT6 UTP 24-port patch panel, 110 type, matches and exceeds CAT6 250MHZ connecting hardware specifications, suitable for interaction and termination of horizontal cabling between devices, equipment and centralized points.

APPLICATION

- Unique exterior design, simple, compact and beautiful
- Unique PCB circuit board design reduces EMI/RFI interference, low attenuation loss and high return loss
- Solid and corrosion phosphor bronze DC ensures over 250 terminations
- With backward compatibility of CAT5E and lower classes
- With 15 μ ,30 μ ,50 μ gold plate can choose, durability is over 1000 matching recycles
- Solid and easy installation design saves installation and operation costs
- Comply with ergonomic principle and termination-free design
- Be compatible with 19-inch equipment racks, cabinets, and wall mount shelf
- All ports are clearly labeled, especially the large label in the front are helpful for points identification

PRODUCT DIMENSION

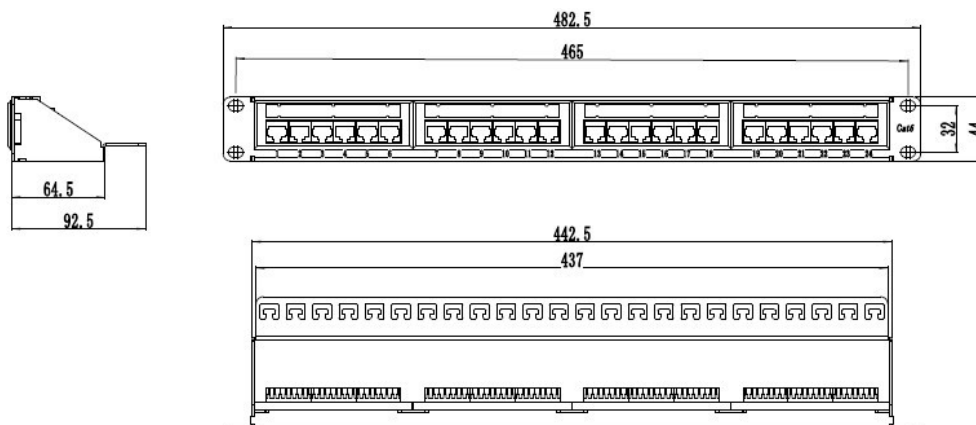




CONSTRUCTION

- Contact resistance (max): 20mΩ
- Insulation resistance (min): 500MΩ
- Return loss (dB): 5.8dB

PERFORMANCE

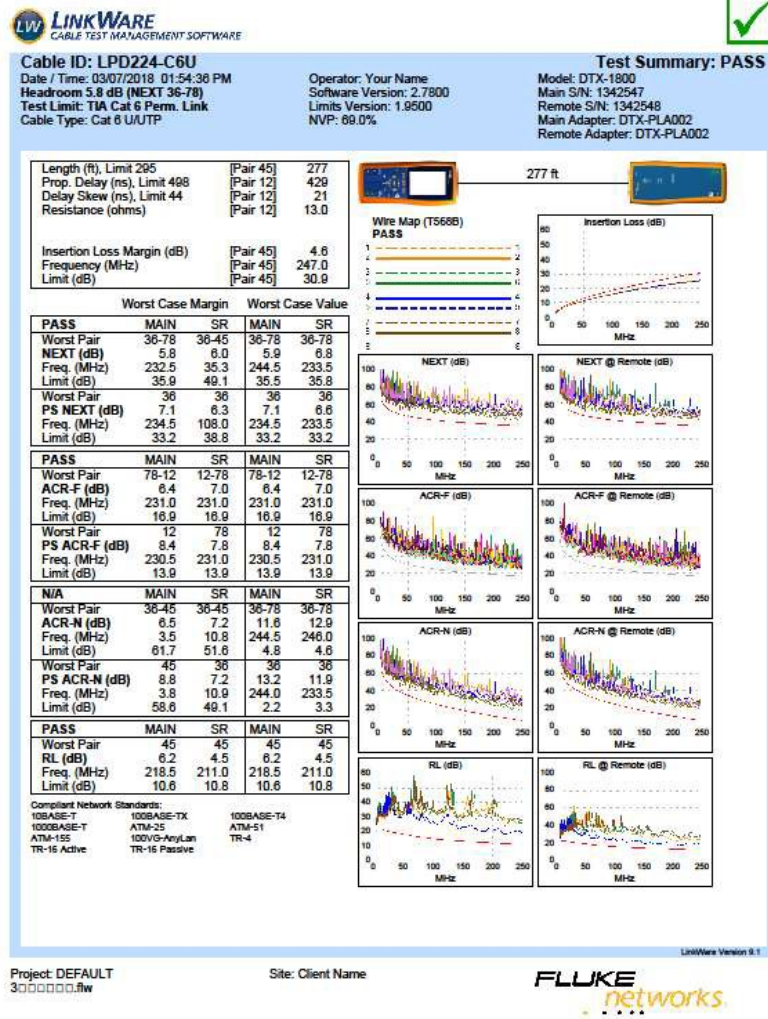

ORDER INFORMATION

Part No.	Description	Color	Inner Box	Carton	Carton measurement (L*W*H)	Weight
9-1614001	CAT6 UTP 24-ports patch panel	black	1 pc.	10 pcs.	53.5 x 31.3 x 23.4 cm	8.20 kg