



**GF3 SLIM** Replacement fiberglass rod  $\varnothing$  3 mm

Cable pulling system for pipe innerdiameter 5 – 40 mm


Item no.: 20952 | 20953 | 20954








**Beginning:** RG4.5 - Guiding head with front thread RTG  $\varnothing$  3 mm incl. swivel




**Ending:** Ending-joint with RTG  $\varnothing$  3 mm, stainless steel





**Attention!**  
Electrical conductive


Repair instruction Coupling joint

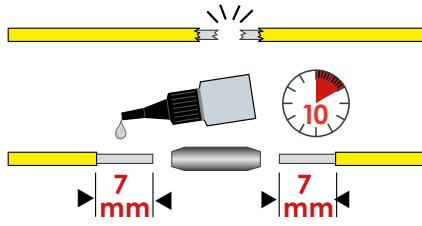

Repair instruction ending joint

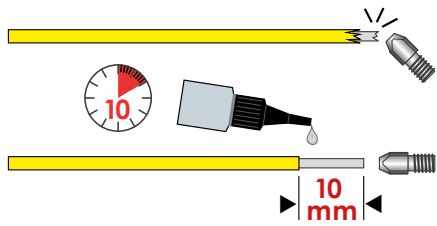


 VIDEO








GF3 SLIM

[Click here Video](#)

 KG 100

[Click here Productinformation](#)

Rod	Rec. pipe- $\varnothing$	Bending radius	Bending radius rod	Breaking load	Total breaking load
$\varnothing$					
3 mm	4 – 40 mm	40 mm	28 mm	450 kg	100 kg

DATA			
ITEM NO.	<b>20952</b>	<b>20953</b>	<b>20954</b>
LENGTH	20 m	30 m	50 m
WEIGHT	0,243 kg	0,346 kg	0,546 kg
MATERIAL ROD	Fiberglass core with PP sheath		
BENDING RADIUS	40 mm		
PIPE INNER $\varnothing$	optimal from 5 - 40 mm		
DIMENSION	H: 20 mm, $\varnothing$ 400 mm		
EAN-CODE	9120045477610	9120045477672	9120045477689

**DESCRIPTION**

GF3 SLIM replacement fiberglass rod  $\varnothing$  3 mm (incl. ending joint at the beginning and end of the rod) with RG4.5 guiding head, pulling eyelet  $\varnothing$  4,5 mm and starting head  $\varnothing$  4,5 mm with thread RTG  $\varnothing$  3 mm. The specified total breaking load of 100 kg always refers to the entire product.

**Optimum filed of application:** for pipe diameters 5 mm - 40 mm

**Application film:** You can watch a short, very informative application film by scanning the QR code or at [www.runpotec.com](http://www.runpotec.com).

**Scope of supply:** 1 x GF3 SLIM replacement fiberglass rod  $\varnothing$  3 mm incl. ending joints on both sides (start/end), 1 x RG4.5 - Guiding head with swivel, 1 x pulling eyelet  $\varnothing$  4.5 mm, 1 x start head  $\varnothing$  4.5 mm

**ADVANTAGES**

- Super thin pulling system
- RG4.5 - Guiding head with front thread RTG  $\varnothing$  3 mm incl. swivel
- Shear-stable
- Total breaking load 100 kg
- Suitable for occupied pipes or fiber optical cable laying (FTTH)
- Bending radius 40 mm

**INFORMATION**

Matching products

**GF3 SLIM Cable pulling tool incl. digital meter counter**

- 20 m - Item no.: 10207
- 30 m - Item no.: 10208
- 50 m - Item no.: 10209



**GF3 SLIM Cable pulling tool without meter counter**

- 20 m - Item no.: 10210
- 30 m - Item no.: 10211
- 50 m - Item no.: 10212



**GF3 SLIM Repairing-Kit**

Item no.: 20951



[Click here Productinformation](#)