



Elegant PRO 6007 IT Rack Cabinet

Elegant IT rack series offers the permanent solution for management of Network devices and cables. The unique, flexible and effective range is the ideal solution to support the Network and server applications with its welded and durable structure.

Elegant IT rack networking Cabinets are intended for installation of data and telecommunication devices and their distribution systems. Mostly used for structured network cabling systems in office environments, Also to be used in computer-rooms and small or large sized data-centers. A lot of options for doors, side- and rear panels, as well as many different accessories, make the use of the enclosure very flexible.

Removable side and rear panels allow comfortable and easy access to the installed devices for maintenance from all sides of the cabinet. For active cooling it is possible to install an optional fan-unit into the roof or 19inch rack mount type fan units. Thanks to flat-pack construction it is possible to bring them also into places with difficult access, basement or attic, In the narrow entrance or stairs.

Vertical mounting rails are adjustable throughout the entire depth of the cabinet and have high carrying capacity with 1.5mm thickness Silk-screen mounting rails are providing ability to count U-Marking from top to down & down to up for easy device installation.

We are responding the needs of users with choice of 9 different height dimensions.

Height: 12U-16U-20U-22U-26U-32U

36U-42U-45U-47U

Width: 600 mm

Depth: 600 mm & 800 mm & 1000 mm







Elegant PRO 600 IT Rack Cabinet

Quick-change fan tray allows accessibility without removing the cables or active devices from the rack in case of any maintenance or replacement

Elegant PRO; The raised top cover has been designed to throw out hot air from the rack and eliminate the risk of dripping water, dust flow, insect entry and also provides a good protection against the unexpected external factors. The ventilation module can be detached by removing 4 pcs screws from the top in case of maintenance or replacement needs.

Protect your device against overheating by choosing the right fan module.

We offer a wide product range of ventilation units with the different fan modules.

On/Off switch Fan modules Analog or digital Thermostat control unit Fan modules





GÜNKO

Rear Cable entry panels with Elegant-Pro





Sliding cable entry panels located on the top cover designed for easiy cabling and High-density cabling by using sliding cable entry panels with the dimensions w: 300mm – D: 56 mm



Brushed rear door cable entry panel w: 300mm – D: 56mm dimensions 1 ea Up to 26U and 2pcs on the Highest Elegant-pro Racks.



Sliding cable entry panels located on the bottom plates has been designed for easily cabling and Highdensity cabling by using sliding cable entry panels with the dimensions w: 300 – D: 125 mm



The vertical mounting rails are adjustable throughout the entire depth of the cabinet and have very high carrying capacity with 1.5mm thickness Silk-screen mounting rails are providing ability to count U-Marking from top to down & down to up for easy device installation.



Castors

Castor and/or levelling feet could be mounted on to rack.

Make it easier with multiple cable entries



Elegant PRO 600 IT Rack Cabinet

Door options / W: 600 mm

The front door is designed to provide security with lock mechanism and decorative view together, fulllength smoked and shatterproof glass door deployed Left & right frames, easily rotated to the left or right

directions by special spring hinge, in case of needs 3 points and single point locking systems are available depends on customer requirements.

Easiy removable side panels complete with Barrel lock & Sliding latch locks

RAL 9005-Black (Standard Colour) RAL 7035-Light Gray (Optional)











Rear Cable entry panels with

Elegant PRO













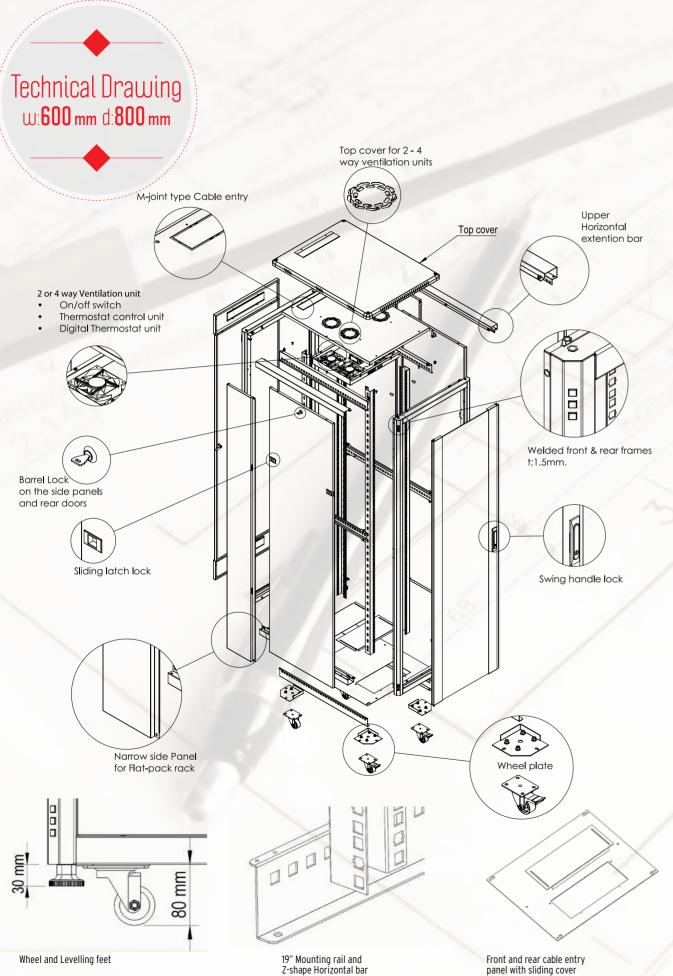

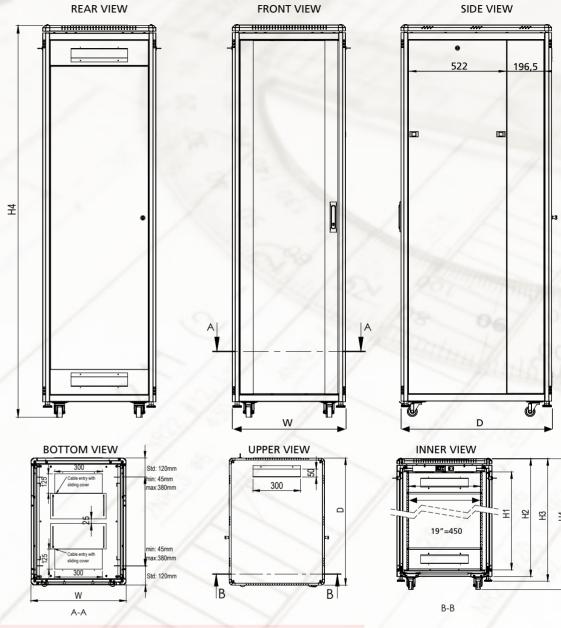

600 x 600 mm Floor Standing Elegant Pro Racks

| Product Code | Product Description | Out Width (W) (mm) | Out Depth (D) (mm) | H:1 Inner Height (mm) | H:2 Out Height without feet & wheel set (mm) | H:3 Out Height with levelling feet (mm) | H:4 Out Height with wheel set (mm) |
|----------------------|---------------------------------------|--------------------------|--------------------------|-----------------------------|--|---|--|
| ELGP 12U 6080 CC 111 | Elegant PRO 19" 12U W=600 mm D=800 mm | 600 | 600 | 536,6 | 661,4 | 691,4 | 741,4 |
| ELGP 16U 6080 CC 111 | Elegant PRO 19" 16U W=600 mm D=800 mm | 600 | 600 | 714,4 | 839,2 | 869,2 | 919,2 |
| ELGP 20U 6080 CC 111 | Elegant PRO 19" 20U W=600 mm D=800 mm | 600 | 600 | 892,2 | 1017 | 1047 | 1097 |
| ELGP 22U 6080 CC 111 | Elegant PRO 19" 22U W=600 mm D=800 mm | 600 | 600 | 981,1 | 1107 | 1137 | 1187 |
| ELGP 26U 6080 CC 111 | Elegant PRO 19" 26U W=600 mm D=800 mm | 600 | 600 | 1158,9 | 1284,8 | 1314,8 | 1364,8 |
| ELGP 32U 6080 CC 111 | Elegant PRO 19" 32U W=600 mm D=800 mm | 600 | 600 | 1425,6 | 1551,5 | 1581,5 | 1631,5 |
| ELGP 36U 6080 CC 111 | Elegant PRO 19" 36U W=600 mm D=800 mm | 600 | 600 | 1603,4 | 1729,3 | 1759,3 | 1809,3 |
| ELGP 42U 6080 CC 111 | Elegant PRO 19" 42U W=600 mm D=800 mm | 600 | 600 | 1870,1 | 1996 | 2026 | 2076 |
| ELGP 45U 6080 CC 111 | Elegant PRO 19" 45U W=600 mm D=800 mm | 600 | 600 | 2003,45 | 2129 | 2159 | 2209 |
| ELGP 47U 6080 CC 111 | Elegant PRO 19" 47U W=600 mm D=800 mm | 600 | 600 | 2092,35 | 2218 | 2248 | 2298 |



Elegant PR

PERFORATED FRONT VIEW



PERFORATED REAR VIEW

W600 Splited Perforated



