

Тел.: +359 2 9231781
 Тел./Факс: +359 2 9231782
 Уеб сайт: <https://www.ic-intracom.bg>
 E-mail: office@ic-intracom.bg
 Skype: ic-intracom-bulgaria




АйСи Интраком ООД
 София, ул. Обиколна № 29



FTTH Cable, figure 8, Solid messenger GJYJC8H-2B6a1-Solid

Схема на кабела

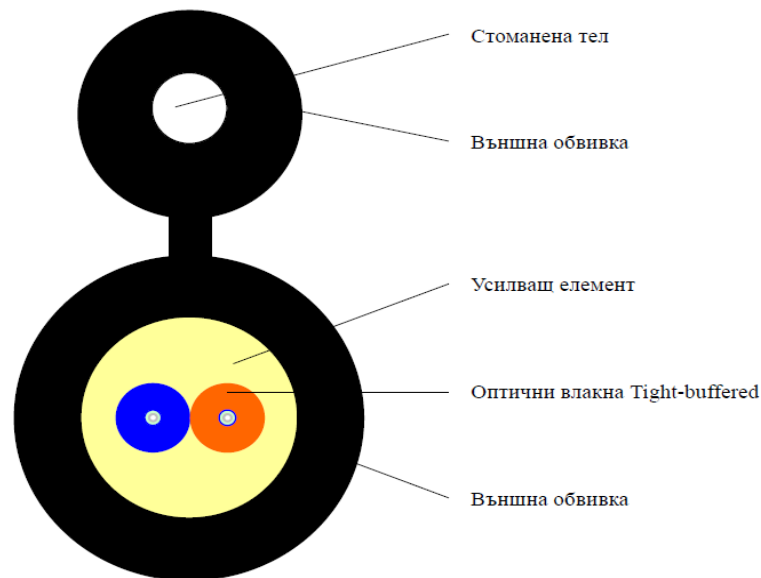

Параметри на влакното

No.	Описание	Мярка	Спецификация
			G.657A1
1	Mode Field Diameter	1310nm	9.0±0.4
		1550nm	10.1±0.5
2	Cladding Diameter	µm	124.8±0.7
3	Cladding Non-Circularity	%	≤0.7
4	Core-Cladding Concentricity Error	µm	≤0.5
5	Coating Diameter	µm	245±5
6	Coating Non-Circularity	%	≤6.0
7	Cladding-Coating Concentricity Error	µm	≤12.0
8	Cable Cutoff Wavelength	nm	λ _{cc} ≤1260
9	Attenuation (max.)	1310nm	≤0.4
		1550nm	≤0.3
10	Macro-Bending Loss	1turn×10mm radius @1550nm	≤0.75
		1turn×10mm radius @1625nm	≤1.5

Тел.: +359 2 9231781
 Тел./Факс: +359 2 9231782
 Уеб сайт: <https://www.ic-intracom.bg>
 E-mail: office@ic-intracom.bg
 Skype: ic-intracom-bulgaria



АйСи Интраком ООД
 София, ул. Обиколна № 29



Мрежови шкафове
 Кабелни Системи



Параметри на кабела

Мярка		Спецификация
Брой на влакната		1, 2 или 4
Tight-buffered Fiber		600µm±50µm
	Material	PVC
	Color	Blue、橙 Orange
Steel Wire	Dimension	1.2mm
Strength Member		Aramid Yarn
Outer Jacket	Dimension	(6.5mm±0.2mm) + (3.5mm±0.2mm)
	Material	LSZH
	Color	Black

Механични параметри

Описание	Мярка	Спецификация
Tension (Long Term)	N	200
Tension (Short Term)	N	600
Crush (Long Term)	N/10cm	300
Crush (Short Term)	N/10cm	1000
Min. Bend Radius (Dynamic)	mm	70
Min. Bend Radius (Static)	mm	35
Installation Temperature	□	0~+50
Operating Temperature	□	-10~+70
Storage Temperature	□	-20~+70