

### Open Rack Double Frame H: 26U-47U W: 540 D: 740


- Designed for applications requiring high density cabling.
- Thanks to its open structure, access to network equipment is at maximum level.
- Compatible with vertical cable organizers where high density cable harness are managed.
- 19" devices can be mounted on the square holes on the body.
- It offers economical solutions.

PN: OPLRK BL XXU C5474

### Technical Data

Dimensions HxWxD in mm  
Height (U)  
Material  
Colour


W: 540 mm D: 540 mm H: (Please check page 2 for height options)  
26U-36U-42U-47U  
Sheet Steel, DIN EN 10130-99 / DC-01 6112 / DC-7122  
*RAL 9005 Black Color = OPLRK BL XXU C5474 or*  
*RAL 7035 L. Gray Color = OPLRK LG XXU C5474*

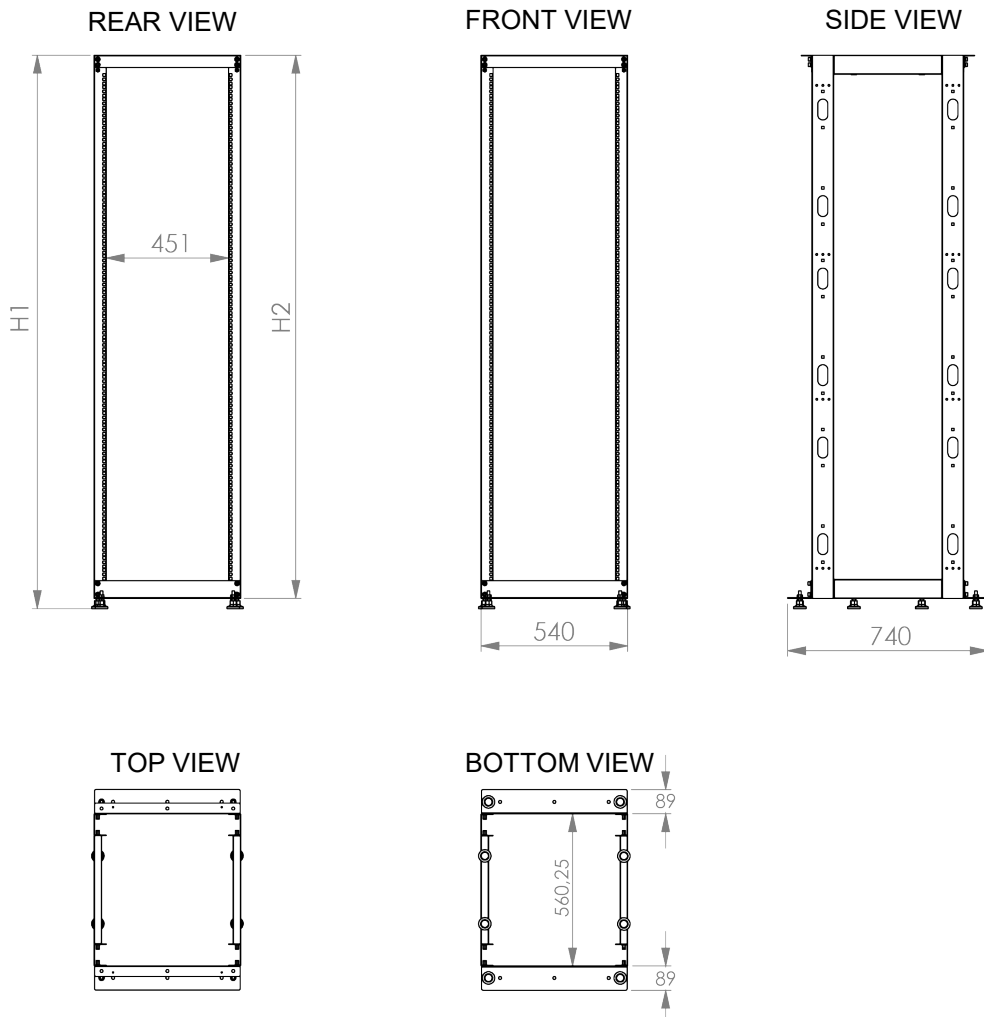

**Open Rack Double Frame 540 x 740 mm**

Product Code	Product Description	Width ( W ) mm	Depth ( D ) mm	H:1 Inner Height (mm)	H:2 Out Height (mm)
OPLRK26UC5474CC	Open Rack 26U Double Frame 540 mm x 740 mm	540	740	1327,5	1290
OPLRK36UC5474CC	Open Rack 36U Double Frame 540 mm x 740 mm	540	740	1772,5	1735
OPLRK42UC5474CC	Open Rack 42U Double Frame 540 mm x 740 mm	540	740	2037,5	2000
OPLRK47UC5474CC	Open Rack 47U Double Frame 540 mm x 740 mm	540	740	2262,5	2225

**Exploded View**

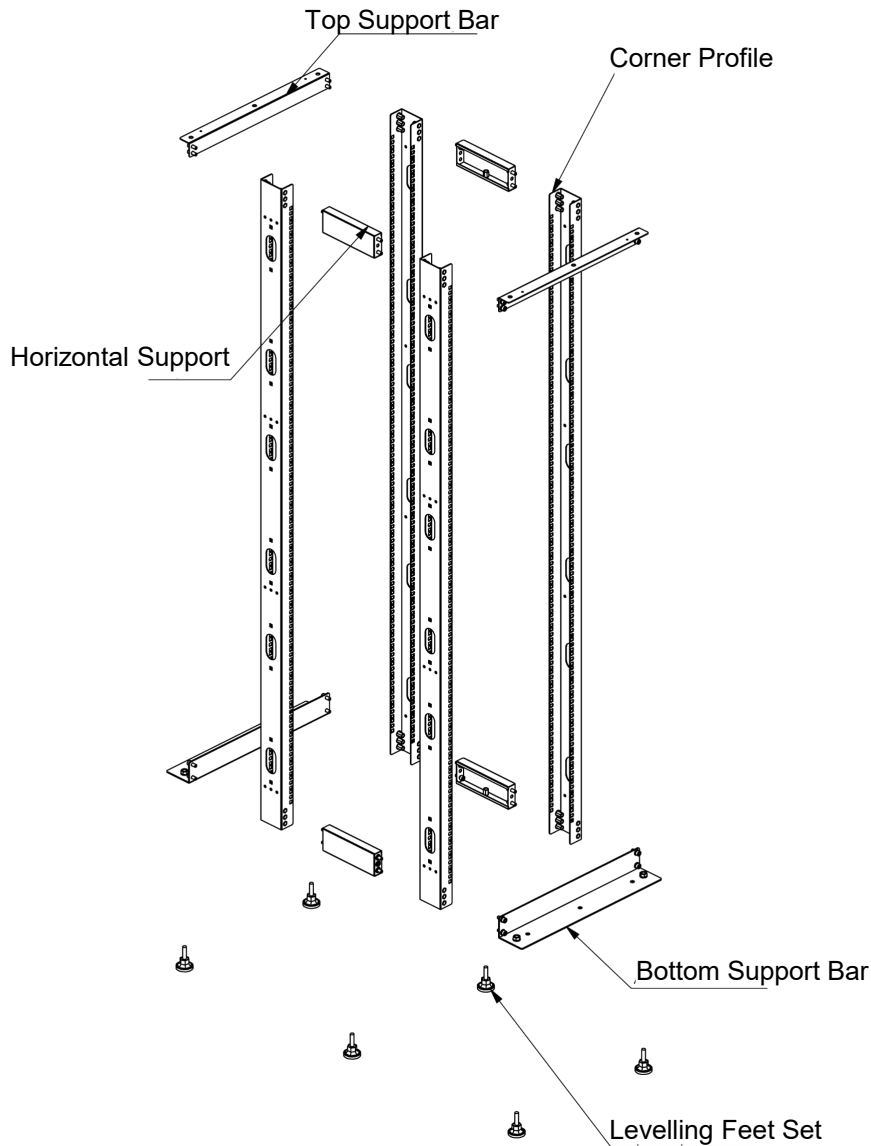

Open Rack Single Frame 540 x 740 mm		ASSEMBLED PACKING INFORMATION		
Product Code	Product Description	WxDxH WidthxDepthxHeight (mm)	Net Weight (kg)	Gross Weight (kg)
OPLRK26UC5474CC	Open Rack 26U Double Frame 540 mm x 740 mm			
OPLRK36UC5474CC	Open Rack 36U Double Frame 540 mm x 740 mm			
OPLRK42UC5474CC	Open Rack 42U Double Frame 540 mm x 740 mm			
OPLRK47UC5474CC	Open Rack 47U Double Frame 540 mm x 740 mm			

*\*\*The information given in the table above are average values and are for informational purposes only. It may vary according to accessories and door options. Please contact our sales consultant for the exact information of your orders.*

## STANDARDS

1. **ISO9001-2008** Quality management system must be used in the production of 19" Rack cabinets
2. In addition, all of the main and auxiliary materials used in the manufacturing process must comply with the following standards
  - **SHEET METAL:** TS EN ISO 9001:2008; TS EN 10130:2006; DIN EN 1030- EQV; BS EN 1030-EQV; NF A36-401
  - **ELECTROSTATIC POWDER PAINT:** ISO 9001:2015 ASTM D523; ASTM D2794; DIN EN ISO 2811-1; ASTM D1186/D1400; Ral: 9005 or Ral: 7035.
  - **CONNECTION COMPONENTS** (screw, nut, washer etc.) TS EN ISO 7045; TS EN ISO 4032; RoHS IEC 62321

## TECHNICAL SPECIFICATIONS

**Body Frame (Single Frame):** bended corner profiles that allow the assembly of the organizer must be formed by screwing top and bottom support bars.

**Profile Structure:** The device mounting holes on the corner profiles must be manufactured with a precision of 1U=44.45 mm, with 9.5x9.5 mm square holes in CNC punch benches with a precision of +/- 0.01. Thanks to its perforated structure, it should allow the installation of vertical cable organizers.

**Bottom Support Bar:** It should form main frame structure by assembling with corner profiles. It should allow the mounting of leveling feet or wheels and should be L-shape bended.

**Top Support Bar:** It should form main frame structure by assembling with corner profiles.

---