### 10.3Gb/s SFP+ Transceiver

#### APSP55HM3xDL80

#### Product Features

- ✓ Supports 9.95 to 11.3Gb/s
- ✓ Duplex LC connector
- ✓ Hot-pluggable SFP footprint
- ✓ Cooled 1550nm EML laser
- √ RoHS compliant and Lead Free
- √ 80Km link length
- ✓ Metal enclosure for lower EMI
- ✓ Built-in dual CDR
- ✓ Power dissipation  $<2.0W (0~70^{\circ}C), <2.3W (0~85^{\circ}C)$ ,  $<2.3W (-40~85^{\circ}C)$
- Commercial and industrial operating temperature optional
- ✓ SFP MSA SFF-8472 SFF-8431 SFF-8432 Compliant



### Applications

- √ 10G Ethernet ZR and 10G

  Fibre Channel
- ✓ OTN G.709 OTU1e/2/2e FEC bit rates
- ✓ SDH STM-64

#### General

ATOP's APSP55HM3xDL80 Small Form Factor Pluggable (SFP+) transceivers are compatible with SFF-8431,SFF-8432 and support 10G Ethernet ZR and 10G Fibre Channel. It is designed for use in 10G-Gigabit multi-rate links up to 80km of G.652. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

#### Product Selection

Part Number	t Number Operating Case temperature			
APSP55HM3CDL80	Commercial(0~70°C)	Yes		
APSP55HM3EDL80	Extend(0~85°C)	Yes		

APSP55HM3IDL80	Industrial(-40~85℃)	Yes	

### Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883 Method 3015
- ESD to the Duplex LC Receptacle: compatible with IEC 61000-4-2
- Immunity compatible with IEC 61000-4-3
- EMI compatible with FCC Part 15 Class B EN55022 Class B (CISPR 22B) VCCI Class B
- Laser Eye Safety compatible with FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2
- ROHS compliant with ROHS 2 (2011/65/EU)


### Pin Descriptions

Pin	Symbol	Name/Description	Ref.
1	VeeT	Transmitter Ground (Common with Receiver Ground)	1
2	TX Fault	Transmitter Fault. LVTTL-O	2
3	TX Disable	Transmitter Disable. Laser output disabled on high or open.	3
3	TA Disable	LVTTL-I	3
4	SDA	2-Wire Serial Interface Data Line(Same as MOD-DEF2 in	2
4	SDA	INF-8074i). LVTTL-I/O	2
5	SCL	2-Wire Serial Interface Data Line(Same as MOD-DEF2 in	2
3	SOL	INF-8074i). LVTTL-I	2
6	Mod_ABS	Module Absent, Connect to VeeT or VeeR in Module.	2
7	RS0	Rate Select 0, optionally controls SFP+ module receiver	4
,		LVTTL-I	4
8	1.00	Loss of Signal indication. Logic 0 indicates normal operation.	5
0	LOS	LVTTL-O	ວ
9	RS1	Rate Select 1, optionally controls SFP+ module transmitter.	4
9	KOI	LVTTL-I	4
10	VeeR	Receiver Ground (Common with Transmitter Ground)	1
11	VeeR	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled. CML-O	

13	RD+	Receiver Non-inverted DATA out. AC Coupled. CML-O			
14	VeeR Receiver Ground (Common with Transmitter Ground)				
15	VccR	Receiver Power Supply	6		
16	VccT	Transmitter Power Supply	6		
17	VeeT	Transmitter Ground (Common with Receiver Ground)	1		
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled. CML- I			
19	TD-	Transmitter Inverted DATA in. AC Coupled. CML- I			
20	VeeT	Transmitter Ground (Common with Receiver Ground)	1		


#### Notes:

- Circuit ground is internally isolated from chassis ground.
- 2. T\_fault is an open collector/drain output. which should be pulled up with a 4.7K 10K Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc+0.3V.A high output indicates a transmitter fault caused by either the tx bias current or the tx output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
- 3. Laser output disabled on TX Disable >2.0V or open, enabled on TX Disable<0.8V.
- 4. Internally pulled down per SFF-8431 Rev4.1.
- 5. LOS is open collector output. Should be pulled up with 4.7k 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
- 6. Internally connected

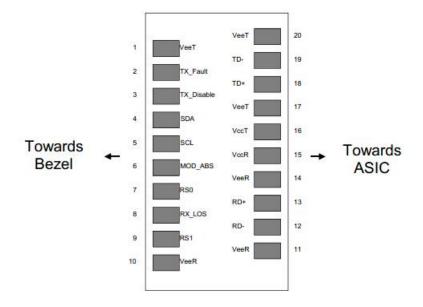

### **Pin-out of Connector Block on Host Board**

### Recommend Circuit Schematic

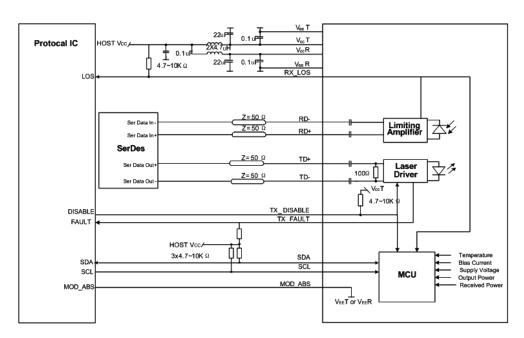

## **Absolute Maximum Ratings**

Parameter	Symbol	Min	Тур	Max	Unit	Ref.
Maximum Supply Voltage	Vcc	-0.5		+4.0	V	
Storage Temperature	TS	-40		+85	°C	
Operating Humidity	RH	0		85	%	

# Recommended Operating Conditions

Parameter	Symbol	Min	Тур	Max	Unit	Ref.
Power Supply Voltage	Vcc	3.13	3.30	3.47	V	
Power Supply Current	Icc			600	mA	Commercial
	Icc			700	mA	Extend
	Icc			700	mA	Industrial
	Тс	0		+70		Commercial
Case Operating Temperature	Te	0		+85	°C	Extend
	TI	-40		+85		Industrial
Bit Rate	Br	9.95		11.3	Gbps	
9/125um G.652 SMF	Lmax			80	km	

# Electrical Characteristics (TOP=25°C, Vcc=3.3Volts)

Parameter	Symbol	Min	Тур	Max	Unit	Ref.			
Transmitter	Transmitter								
Input differential impedance	Rin	80	100	120	Ω	1			
Differential data input swing	Vin, pp	120		850	mV				
TX Disable-High		Vcc – 0.8		Vcc	٧				
TX Disable-Low		Vee		Vee+ 0.8	V				
TX Fault-High		Vcc-0.8		Vcc	V				
TX Fault-Low		Vee		Vee+0.8	V				
Receiver									
Single ended data output swing	Vout, pp	300		850	mV	2			
Data output rise time	Tr	30			ps	3			
Data output fall time	Tf	30			ps	3			
LOS-High		Vcc – 0.8		Vcc	V				
LOS-Low		Vee		Vee+0.8	V				

### Notes:

- 1. AC coupled.
- 2. Into 100 ohm differential termination.
- 3. 20 80 %

# Optical Characteristics (TOP=25°C, Vcc=3.3 Volts)

Parameter	Symbol	Min	Тур	Max	Unit	Ref.	
Transmitter							
Output Opt. Power	PO	0		4	dBm		
Optical Wavelength	λ	1530		1565	nm		
Side-Mode Suppression Ratio	SMSR	30			dB		
RMS Spectral Width(-20dB)	σ			1	nm		
Relative Intensity Noise	RIN			-128	dB/Hz		
Path penalty at 1600ps/nm@9.95Gb/s				3	dB		
Optical Extinction Ratio	ER	9			dB		


Receiver						
RX Sensitivity @10.3 Gb/s	SENS			-24	dBm	1,2
Receiver Overload		-7			dBm	
Optical Center Wavelength	λC	1260		1600	nm	
LOS De-Assert	LOSD			-28	dBm	
LOS Assert	LOSA	-37			dBm	
LOS Hysteresis		0.5			dB	


#### Notes:


- Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
- Measured with PRBS  $2^{31}$  -1 at  $10^{-12}$  BER.

### **Mechanical Specifications**

ATOP's Small Form Factor Pluggable (SFP+) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).



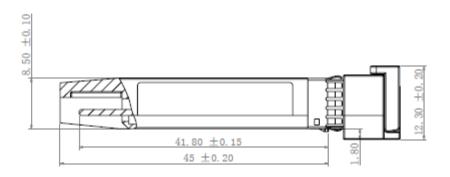


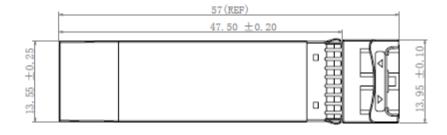


APSP55HM3xDL80

### **EEPROM Information**

EEPROM memory map specific data field description is as below:

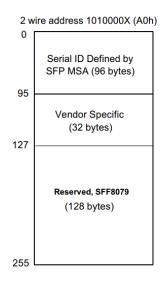

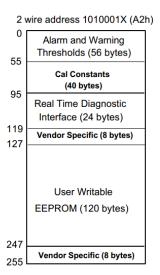

## Digital Diagnostic Monitoring Interface

Five transceiver parameter values are monitored. The following table defines the monitored parameter's accuracy.

Parameter	Range	Accuracy	Calibration
	0 to +70°C (C)		
Temperature	0 to +85°C (E)	±3°C	Internal
	-40 to +85°C (I)		
Voltage	2.97 to 3.63V	±3%	Internal
Bias Current	0 to 100mA	±10%	Internal
TX Power	0 to 4dBm	±3dB	Internal
RX Power	-24 to -7dBm	±3dB	Internal

## Revision History

Revision	Initiated	Reviewed	Approved	DCN	Release Date
V1.0	Xiaoaiyou	Sunbin	Dingzheng	New Released.	Feb 17,2017

### For More Information

### **ATOP Corporation**

Tel: +86-755-86674946 Fax: +86-755-86296723

Email: <a href="mailto:sales@atoptechnology.com">sales@atoptechnology.com</a>
Web: <a href="mailto:www.atoptechnology.com">www.atoptechnology.com</a>