



### Co-location 19" Free Standing Rack Cabinet

- Cabinet design that is equipped to serve more than one project at the same time
- Secured access
- Cabinet structure with 4 compartments
- Optional perforated front and rear doors upon customer request
- Removable and lockable side panels
- Top case with M-joint cable entry, fan cut-out and suitable for fan mounting
- Bottom case with sliding cover and cable entry
- 4 pieces of 19" mounting rails with 1.5 mm thick, numbered from top to bottom and bottom to top that can be moved along the depth of the cabinet.
- 1000 kg carrying capacity (The capacity can be increased up to 1500 kg)

List Code: ELGCLXXUXXXXBLXXXXU


### Technical Specifications

Dimensions: WxDxH mm  
Height in U  
Color

(Please contact with sales representative)  
(Please contact with sales representative)  
*RAL 9005 Black Color = BL*

Material  
Standard  
Climatic Test  
Industrial Atmospheric Test  
Static Mechanical Load Test  
Dynamic Load Test - Vibration  
Dynamic Mechanical Load Test - Shock  
Impact Test  
IP rating

Sheet Steel, DIN EN 10130 DC-01 (6112) / EN 10346 DX51D + Z (1311)  
TS EN 61587-1 TS EN 61587-2  
C2  
A2  
SL12- LT5 -ST5 -NL5  
DL4V  
DL4S  
IK07  
IP20

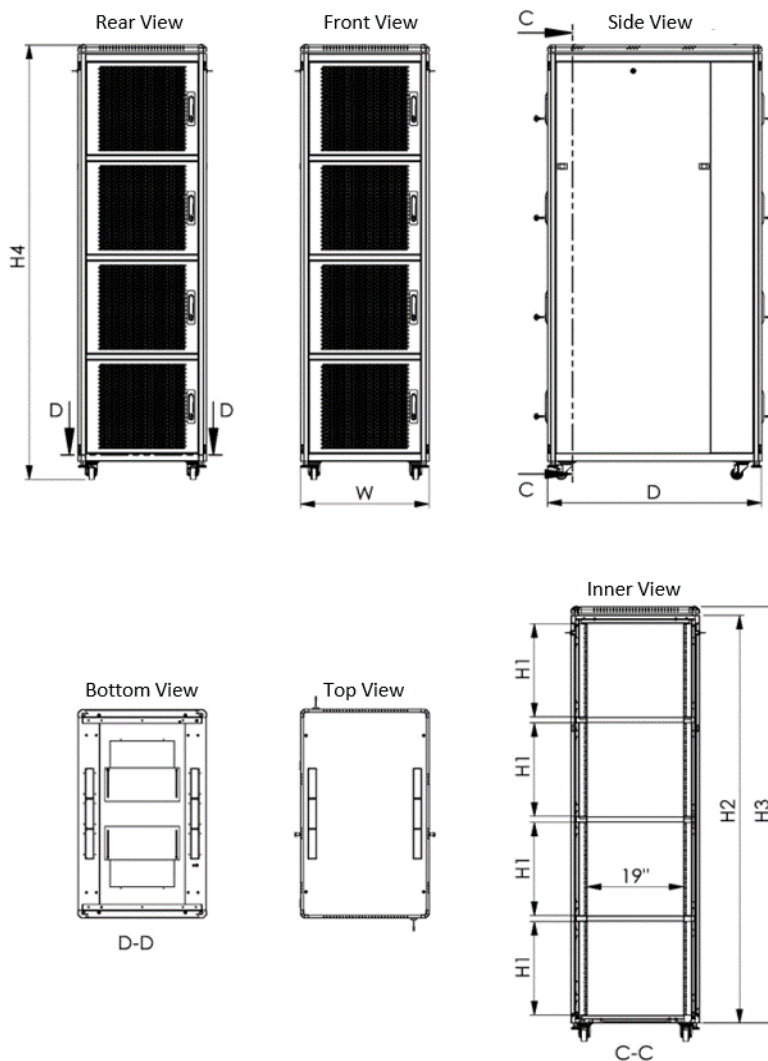

Co-location Cabinet

Product Code	Product Description	Width (W) mm	Depth (D) mm	H:1 Inner Height (mm)	H:2 Outer Height without Levelling Feet & Caster Set	H:3 Outer Height with Levelling Feet	H:4 Outer Height with Caster Set
ELGCL42U60XXBL4X10U	42U 600x1000/1200mm Colocation Cabinet (4x10U)	600	1000/1200	10U	1996	2026	2076
ELGCL45U60XXBL4X11U	45U 600x1000/1200mm Colocation Cabinet (4x11U)	600	1000/1200	11U	2129	2159	2209
ELGCL47U60XXBL4X12U	47U 600x1000/1200mm Colocation Cabinet (4x11U)	600	1000/1200	11U	2218	2248	2298
ELGCL42U80XXBL4X10U	42U 800x1000/1200mm Colocation Cabinet (4x10U)	800	1000/1200	10U	1996	2026	2076
ELGCL45U80XXBL4X11U	45U 800x1000/1200mm Colocation Cabinet (4x11U)	800	1000/1200	11U	2129	2159	2209
ELGCL47U80XXBL4X12U	47U 800x1000/1200mm Colocation Cabinet (4x11U)	800	1000/1200	11U	2218	2248	2298

\*BL representative color code.

Explode View

